





美式悬式绝缘子


SUSPENSION INSULATORS (ANSI CLEVIS TYPE)




52-1



52-9



52-2

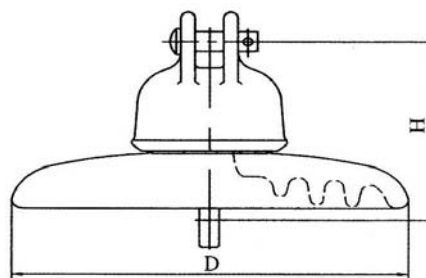

52-4

52-6

ANSI Class		52-1	52-2	52-4	52-6	52-9
Porcelain Disc Diameter,D,mm		152	190	254	254	108
Unit Spacing,H,mm		140	146	146	146	160
Creepage Distance,mm		178	210	292	292	171
Combined M & E Strength,KN		44	67	67	111	44
Impact Strength ,Nm		5	5.5	6	7	5
Routine Proof Test Load,KN		22	33.5	33.5	55.5	22
Time Load Test Value,KN		27	44	44	67	27
Power Frequency	Dry,KV	60	65	80	80	60
	Flashover Voltage	Wet,KV	30	35	50	50
Critical Impulse	Pos,KV	100	115	125	125	100
	Flashover Voltage	Neg,KV	100	115	130	130
Power Frequency Puncture Voltage,KV		80	90	110	110	80
Radio Influence	Test Voltage to Ground,KV	7.5	7.5	10	10	7.5
	Voltage Data	Max.RIV at 1000 KHz,uV	50	50	50	50
Net Weight,Approx.,kg		2.5	3.5	4.6	5.5	2.5