



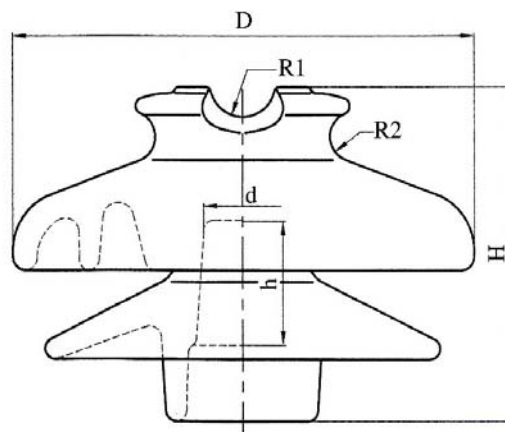

美式针式绝缘子  
**PIN INSULATORS (ANSI STANDARD TYPE)**

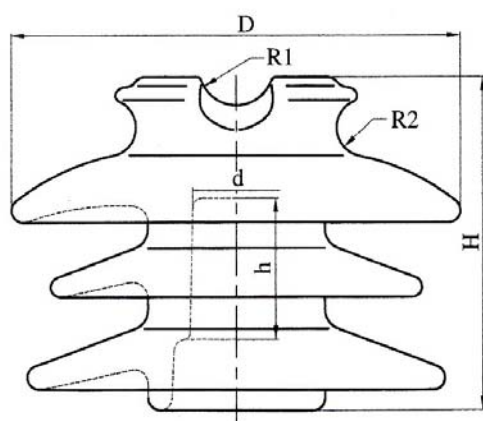

56-1  
56-2

56-3

The following pin insulators comply with ANSI Standard.  
The glaze colors of the insulators are brown or light gray.

ANSI Class(Radio Free)		56-1	56-2	56-3
Recommend Pin Length,mm		152	178	203
Creepage Distance,mm		330	432	533
Dry Arcing Distance,mm		178	210	241
Dimensions,mm	H	146	165	191
	h	51	51	51
	D	191	229	267
	d	35	35	35
	R1	19	19	19
	R2	14	14	14
Cantilever Strength,kN		11	13	13
Power Frequency Flashover Voltage	Dry,kV	95	110	125
	Wet,kV	60	70	80
Critical Impulse Flashover Voltage	Pos.,kV	150	175	200
	Neg.,kV	190	225	265
Power Frequency Puncture Voltage,kV		130	145	165
Radio Influence Voltage Data	Test Voltage to Ground,kV	15	22	30
	Max.RIV at 1000kHz,uV	100	100	200
Net Weight,Approx.,kg		3.7	5.3	7

Standard Specification:ANSI C29.6