




美标支柱绝缘子

LINE POST INSULATORS (ANSI Standard Type)

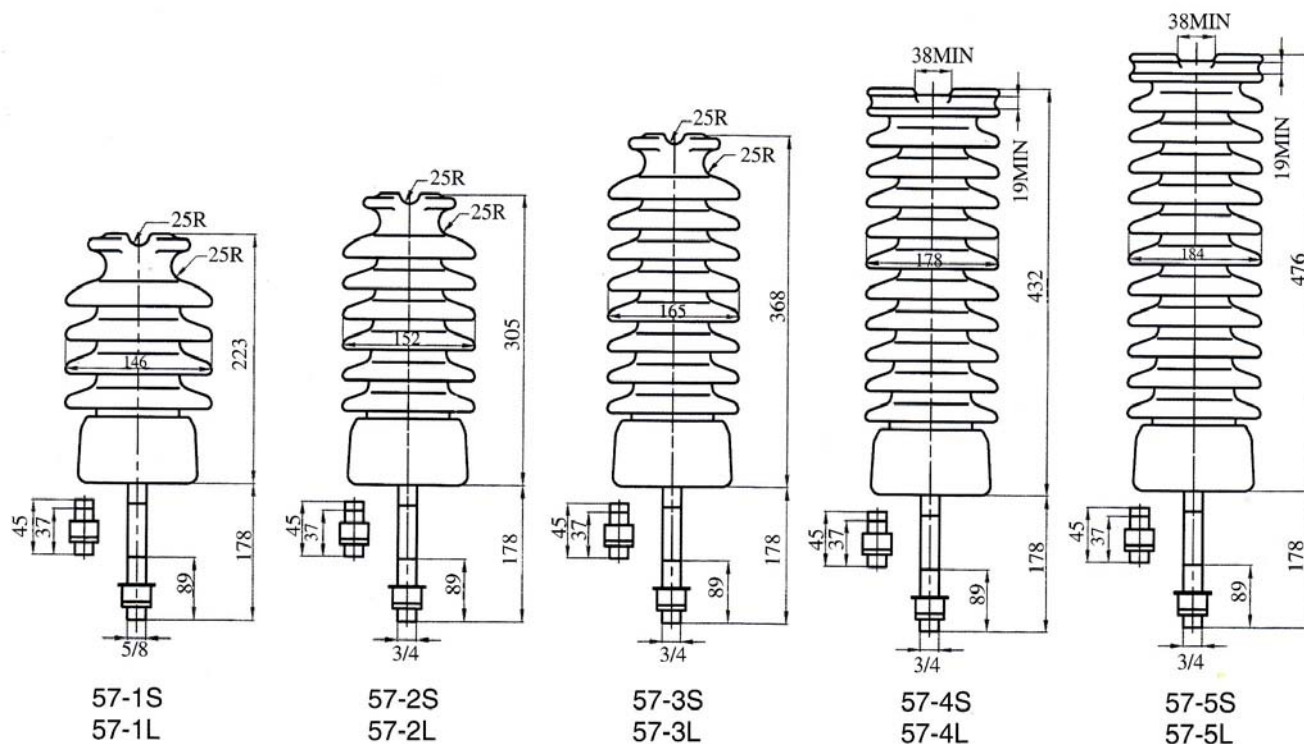

ANSI Class	57-1S 57-1L	57-2S 57-2L	57-3S 57-3L	57-4S 57-4L	57-5S 57-5L
Stud Thread, inches	5/8	3/4	3/4	3/4	3/4
Creepage Distance, mm	356	559	737	1015	1145
Dry Arcing Distance, mm	165	241	311	368	438
Cantilever Strength, KN	12.5	12.5	12.5	12.5	12.5
Power Frequency Flashover Voltage	Dry, KV	80	110	125	150
	Wet, KV	60	85	100	125
Critical Impulse Flashover Voltage	Pos., KV	130	180	210	255
	Neg., KV	155	205	260	340
Radio Influence Voltage Data	Test Voltage to Ground, KV	15	22	30	44
	Max. RIV at 1000KHZ, UV	100	100	200	200
Net Weight, Approx., kg	5.2	9.0	11	16	18

NOTE:

- Standard:** comply with the ANSI Standard C29.7
- Colour:** the glaze colors of the insulators are brown or light gray.
- The dimension** of neck for 57-1, 57-2, 57-3 is in accordance with F
The dimension of neck for 57-4, 57-5 is in accordance with N